


DYNOJET RESEARCH
 CRYSTAL AUTO Co.LTD., 242-0001 2-11-8simoturuma yamato-city kanagawa japan

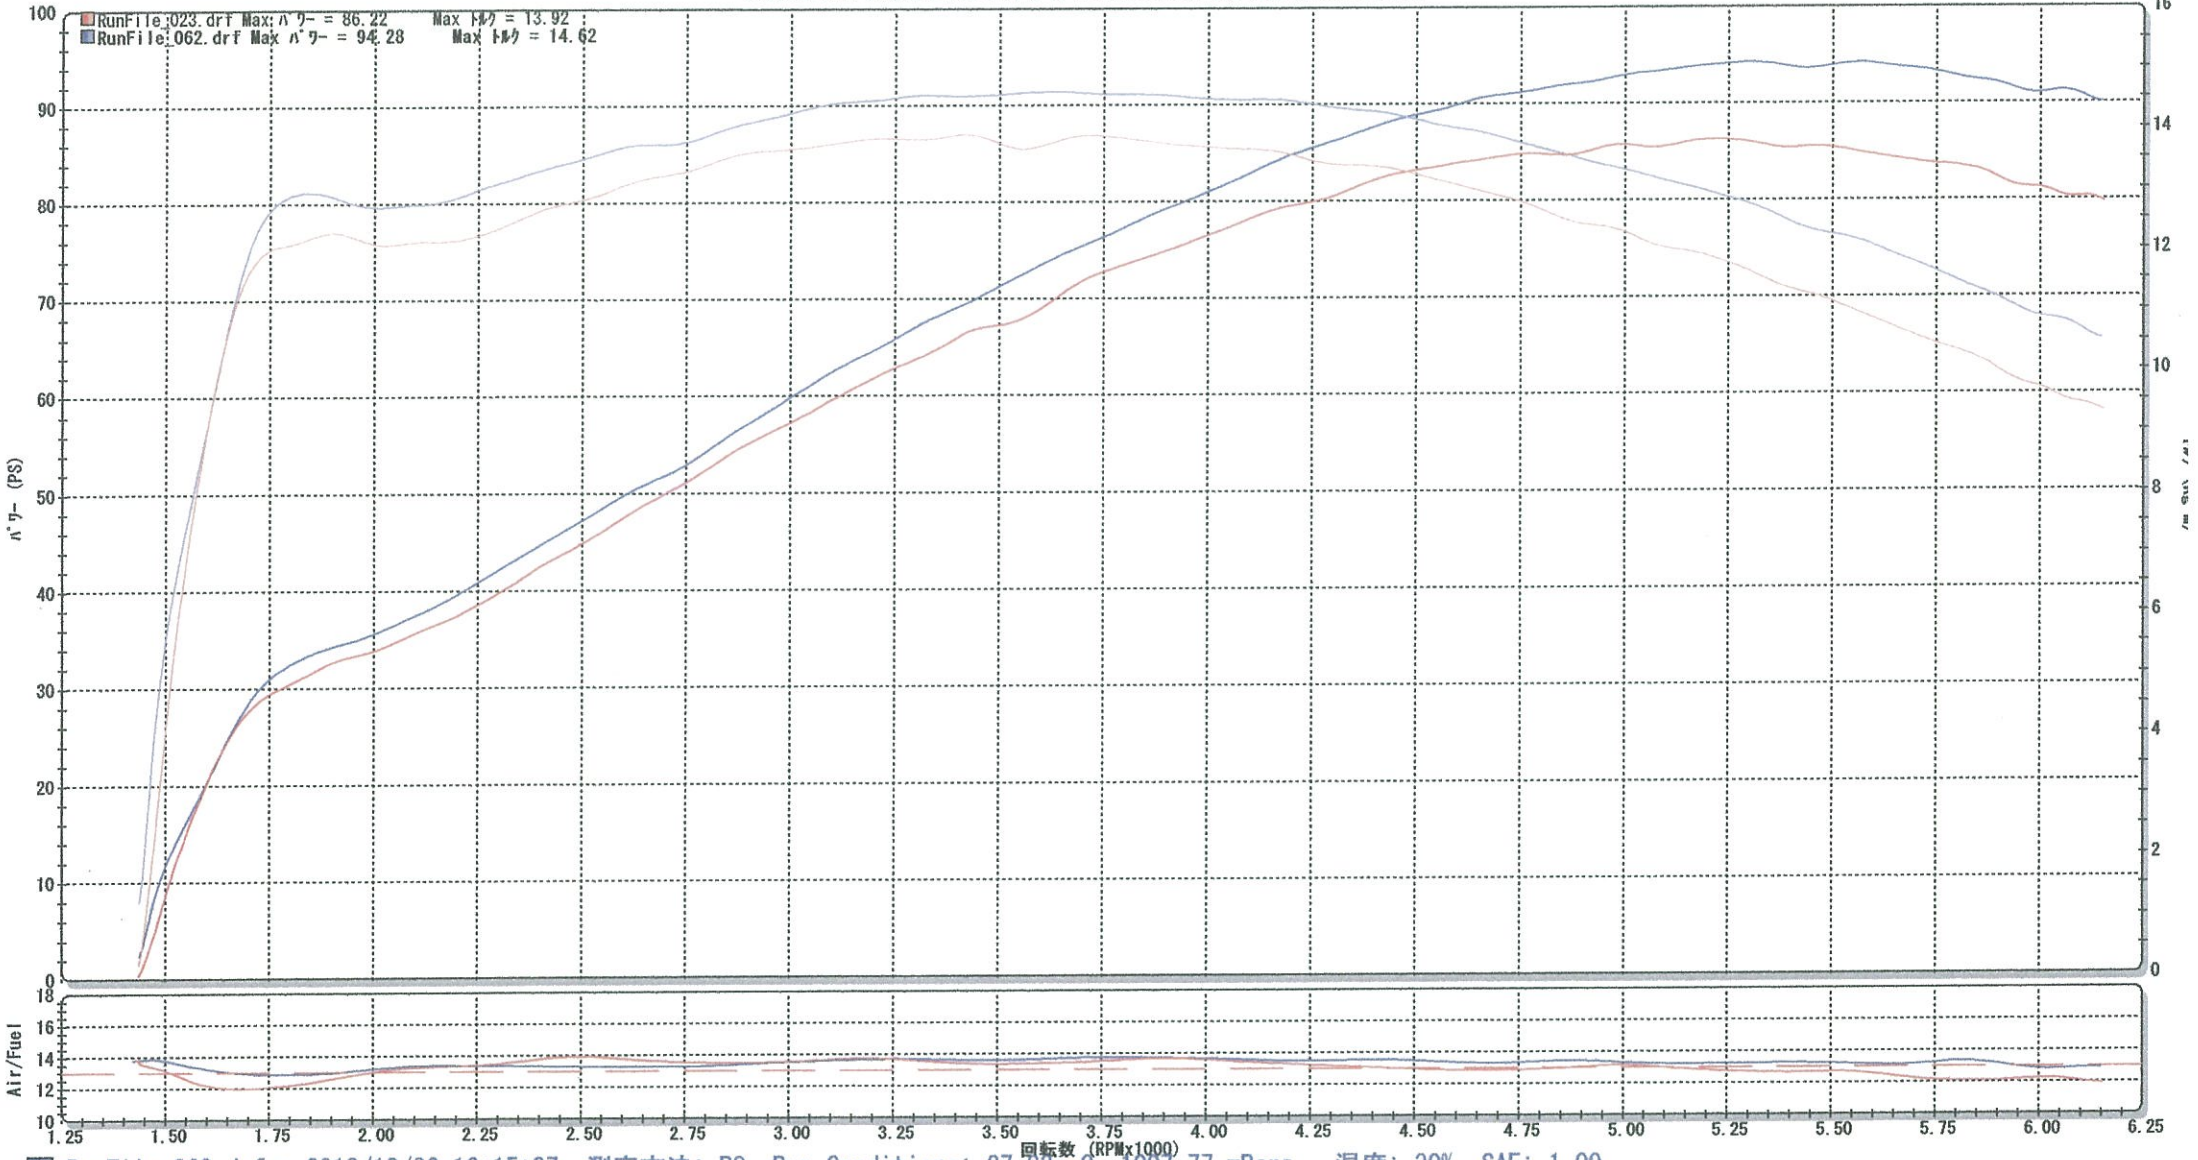

■ RunFile_062.drf - 2013/12/26 16:15:07 測定方法: RO Run Conditions: 27.83 -C, 1007.77 mBars, 湿度: 30%, SAE: 1.00
 12y FLTRXSE TC110, Thunder Max, SE58mm T/B, SE5. 3Inj, Vance Exh, Rinehart 4" Mufflor, RSD AC
 Max Power = 94.28 Max Torque = 14.62

■ RunFile_023.drf - 2013/12/26 11:15:42 測定方法: RO Run Conditions: 9.67 -C, 1011.05 mBars, 湿度: 56%, SAE: 0.95
 12y FLTRXSE TC110, Thunder Max, SE58mm T/B, SE5. 3Inj, Vance Exh, Rinehart 4" Mufflor, RSD AC
 Max Power = 86.22 Max Torque = 13.92